

Rollmaxx nexgen SW2600



FEATURES:

Aluminium Deck Construction

Hinged Aluminium Ramps

Top Quality Components;
 including LED Lights

Robust Steel Mudguards;
 Powdercoated in a range of colours

HDPE Buffers on Bucket Rest

Mechanical-Override Braking
 AVS Approval No. 50387/50664

Mechanical Drum Brakes



13" Steel Wheels

50mm Lockable Head Coupling

The Rollmaxx SW2600 model is designed for transportation of Mini Excavators. With exclusive mechanical override braking system combined with a heavy-duty design & construction allows high allowable payloads.

These compact Trailers maintain impressively low tare weight of 400kg, making it possible to carry up to 2,200kg with an Aggregate Trailer Mass [A.T.M] of 2,600kg.

A	1900
B	1140
C	4700
D	470
E	350
F	1400
G	1400
H	1900
I	450
TARE:	400kg
A.T.M	2600kg
PAYLOAD:	2200kg

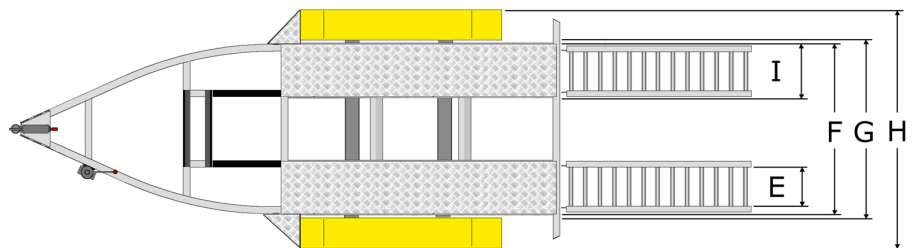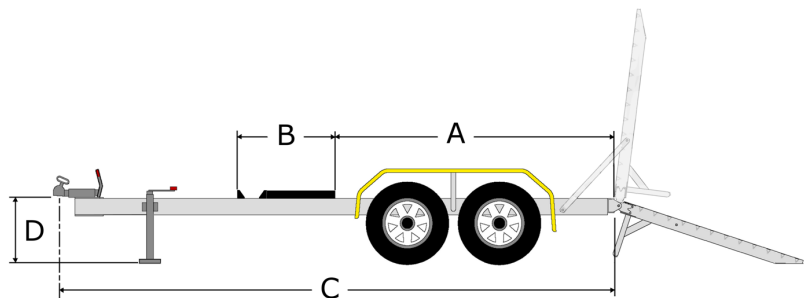

A - Deck Length
 B - Bucket Rest Length

C - Trailer Length
 D - Coupling Height
 E - Ramp Width
 (internal)

F - Deck Width
 G - Clearance Between Guards
 H - Trailer Width
 I - Deck Section Width

